




FC Frost Limited
Bankside Works Benfield Way
Braintree Essex CM7 3YS
United Kingdom
T: +44 (0)1376 329111
F: +44 (0)1376 347002
E: sales@fcfrost.com
W: www.fcfrost.com

Drinking Water Fountain 05.3007

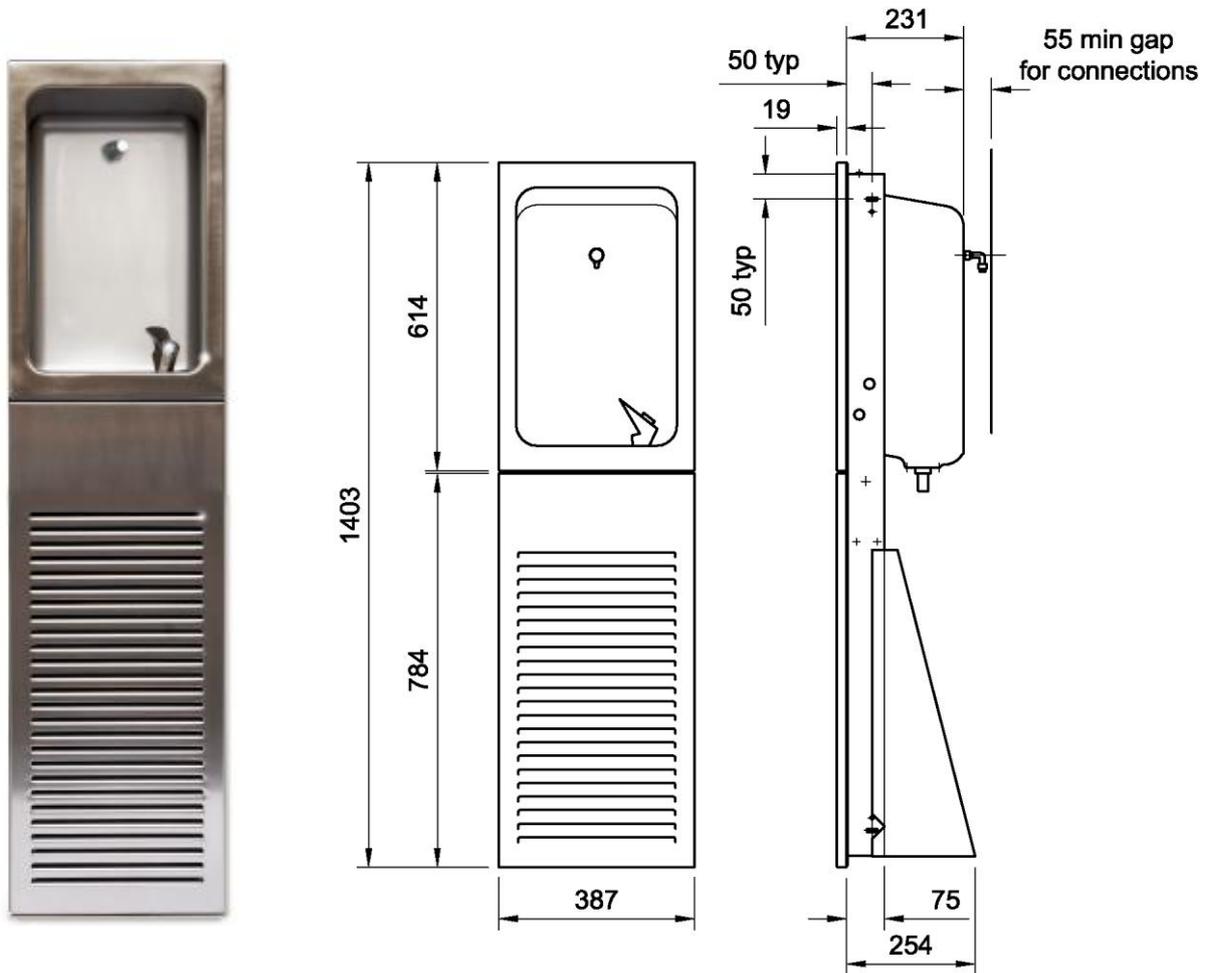

Specification

WRAS approved recess mounted drinking water fountain with brushed finish bubbler and cup filler. Model number 05.3007 with vertically brushed satin finish stainless steel louvre panel and black powder coated mild steel frame with cradle for water chiller (Chiller supplied separately). Manufactured by FC Frost Ltd. **N.B.** For water chiller order **05.9077**

Material

- Panel/Bowl: 1.2mm satin finish stainless steel grade 1.4301 (304)
- Frame: 1.5mm mild steel powder coated black
- Bubbler: Brushed chrome plated brass
- Cup Filler: Brushed chrome plated brass



1703072

Operation

Bubbler:

- To activate bubbler, depress button on top-rear of bubbler
- Adjustment of water flow can be achieved by tightening/loosening slotted spout (Pressure rating 22 PSI/1.5 Bar minimum to 120 PSI/8 Bar maximum)

Cup Filler:

- To activate cup filler, place cup underneath spout and depress plunger located on front of cup filler
- Adjustment of water flow can be achieved by tightening/loosening screw on underside of the cup filler (Pressure rating 22 PSI/1.5 Bar minimum to 72.5 PSI/5 Bar maximum)




FC Frost Limited
Bankside Works Benfield Way
Braintree Essex CM7 3YS
United Kingdom
T: +44 (0)1376 329111
F: +44 (0)1376 347002
E: sales@fcfrost.com
W: www.fcfrost.com

Drinking Water Fountain 05.3007

Installation

Recommended wall opening of 352w x 1368h x 290d
Recommended mounting height from underside of unit to FFL 225mm (Male).

1. Remove and retain countersunk fixing screws from both sides of louvre panel.
2. Remove louvre panel by pulling at the base of the panel, this will detach the ball studs.
3. Lift panel up and unhook from top bracket.
4. Remove bowl from frame by unscrewing the fixings holding the bowls lower brackets to the side of the frame (Retain fixings).
5. Lift bowl up and unhook from top bracket.
 - Position the frame into the prepared wall
 - Fit temporary screws into slots on side walls. Do not fully tighten screws into wall, to allow for horizontal adjustment
 - Fix frame to studwork using suitable screws (Fixing holes $\text{\O}6.5\text{mm}$) and remove temporary screws from slots
 - Re-fit bowl.
 - Plumb suitable WRAS approved pipework to bubbler and cup filler (10mm pipe compression connection suitable for copper pipe) and fit bowl waste (1.25" BSP male thread)
 - Refit louvre panel

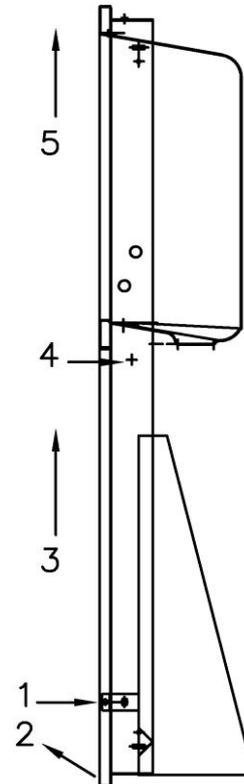

Spares

Contact FC Frost for spares requirements: service@fcfrost.com

Care and Maintenance

Clean with soap and warm water, dry with a clean soft cloth.

To maintain finish use any industrial steel cleaner, polishing along the material grain with a clean soft cloth.

FC Frost Ltd recommends "Steel Clean" cleaning agent, obtainable from: Vitopan (Tel: 01204 863000)

Abrasive cleaners, chloride cleaning agents and carbon steel brushes/steel wool will scratch the stainless steel and should not be used.

Warranty

This product is covered by a 12-month warranty from the date of purchase to be free from defects if installed and maintained in accordance with these instructions. FC Frost will replace or repair (as appropriate) free of charge any product with a proven manufacturing defect if reported within the warranty period.